

LM3800W

# WIFI MYQ DC PLUG-IN GARAGE DOOR OPENER

Maintenance-free plug-in garage door opener for sectional doors.

## WARRANTY

MOTOR: 5 YEARS  
CONTROL BOARD: 5 YEARS  
ACCESSORIES: 2 YEARS

## SPEED

MAX. 36 RPM  
(TO OPEN)  
MAX. 21 RPM  
(TO CLOSE)

## SILENT DC MOTOR

REDUCES NOISE AND  
VIBRATIONS

## OPTIONAL BACKUP BATTERY

2.6 W STANDBY  
CONSUMPTION

EUROPE'S FIRST  
JACKSHAFT GARAGE  
DOOR OPENER WITH  
INTEGRATED WIFI!




## KEY FEATURES

**WALL MOUNT  
RESIDENTIAL WI-FI  
GARAGE DOOR OPENER**  
for quick and easy MyQ setup

**SPACE-SAVING**  
design allows  
versatile application

**LIFTING POWER**  
for doors up to 130 kg

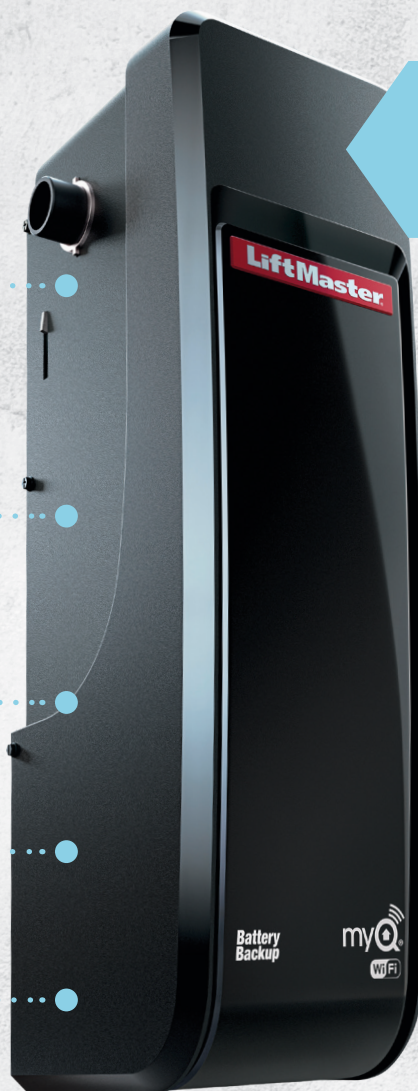

## ACCESSORIES INCLUDED:

827EV



### MYQ RADIO LED LIGHTING

Low power, long-lasting LED lighting for flexible positioning (1,500 lm).

041-0003



### COUPLING

Secure connection between the shaft and the drive.

841EU



### E-LOCK 12V

Automatically locks the garage door every time you closed it.

TX4EVF






### 4-CHANNEL REMOTE CONTROL

For up to 4 drives.

# TECHNICAL DATA

Input voltage	230-240 VAC, 50 Hz
Max. torque	36 Nm - AC + BATTERY 29 Nm - only AC
Nominal torque	10 nm
Power	150 W
Standby	2.6 W
Motor type	DC geared motor with permanent lubrication
Noise levels	57 dB
Travel speed	21 r/min (down), 36 r/min (up)
Safety functions	Automatic reversing during downward travel Automatic stop during upward travel
Electronic	Automatic force detection and obstacle detection
Electrical	Transformer overload protection and low voltage push-button wiring
Limit switch	Electronic
Start circuit	low voltage push-button circuit
Max. door height	3 m
Max. door width	5.5 m
Max. door area	16.5
Max. door weight	130 kg
Weight	11 kg
Receiver storage register	64
Operating frequency	433/868 MHz, 2.4 GHz (WIFI)
Installation requirements	Torsion bar diameter Ø 25,4 mm Required side clearance min. 21.6 cm
Connectable accessories	Wall control/Keyswitch, Safety sensor, Multifunctional wall control, LED Flashing Light, Cable tension monitor, E-lock (up to 2 locks)

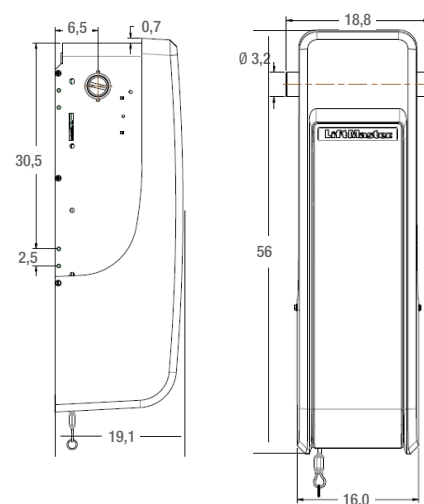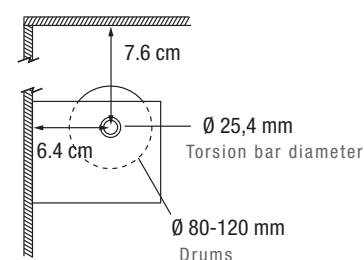

# INNOVATIVE WIFI TECHNOLOGY.

## BENEFITS OF TECHNOLOGY:

- quick and easy setup directly on the drive via smartphone or tablet
- no separate gateway required

## INTUITIVE AND FAST SETUP


1. Establish WiFi connection to the router



2. Create a MyQ Account



3. Add drive and get started

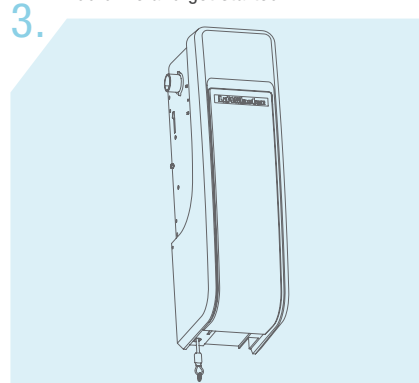

## FOR MORE INFORMATION, PLEASE VISIT LIFTMASTER.EU

© 2019 LiftMaster all rights reserved  
Chamberlain GmbH, Alfred-Nobel-Str. 4, D-66793, Saarwellingen  
Please note – new address from June 2019:  
Chamberlain GmbH, Saar-Lor-Lux-Str. 19, D-66115 Saarbrücken  
LiftMaster.eu, WEEE-Reg.No. DE66256568  
MyQ<sup>®</sup> is a registered trademark of the Chamberlain Group  
HomeLink<sup>®</sup> is a trademark of Gentex Corporation Wi-Fi<sup>®</sup> is a  
registered trademark of the Wi-Fi Alliance  
9SLM3800W02



**LiftMaster**