

# LM750EVGB MYQ DC ROLLING DOOR OPENER

Fast, silent & powerful DC motor with soft start and soft stop.



## KEY FEATURES

**HEAVY-DUTY**  
DC motor with automatic force sensing

**LIFTING**  
For doors up to 120 kg

**LED LIGHT**  
LED turns on with activation

**MYQ COMPATIBLE**



## SMART

**MYQ MOBILE APP** LETS USERS RECEIVE ALERTS AND CONTROL THE OPENER FROM ANYWHERE.

**LOW STANDBY** SAVES YOUR MONEY.

**SPACE-SAVING DESIGN** OPENS UP THE CEILING.

**SOFT-START AND SOFT-STOP** FOR SMOOTH OPERATION.

## QUIET AND RELIABLE

**QUIET DC MOTOR** 59 DB NOISE LEVEL ELIMINATES NOISE AND VIBRATIONS THROUGH THE CEILING AND PROVIDES SMOOTH OPERATION.

**HEAVY LIFTING POWER** OPERATES DOORS UP TO 120 KG. FOR DOORS UP TO 18m<sup>2</sup>

**WARRANTY** MOTOR: 5 YEARS, ACCESSORIES: 2 YEARS.

## SECURE & SAFE

**AUTOMATIC GARAGE DOOR OPENERS** IMPEDE UNAUTHORISED ACCESS TO THE GARAGE.

**TIMER-TO-CLOSE**<sup>2</sup> AUTOMATICALLY CLOSES THE DOOR AFTER A PRESET AMOUNT OF TIME.

**EVOLUTION RADIO (SECURITY+ 2.0)** SENDS A NEW CODE WITH EVERY REMOTE CLICK.

**AUTOMATIC** FORCE SETTING & OBSTACLE DETECTION.

**AUDIBLE SIGNAL** (OPTIONAL).

**PARTIAL OPENING.**

## INCLUDED ACCESSORIES:

### 4-CHANNEL 868 MHz REMOTE CONTROL

Operates up to 4 openers. Compact to provide quick, easy garage access.



**TX4EVS**

### 2-BUTTON WIRELESS WALL CONTROL

Operates up to 2 openers. Control your garage door without a remote control.



**128EV**

## POWERFUL ADD-ONS:

### INTERNET GATEWAY<sup>2</sup>

MyQ technology that connects to the internet and allows monitoring and control of the garage door opener.



**828EV**

### WIRELESS KEYPAD

Provides convenient, secure access from outside the garage with a 4-digit PIN, temporary PIN possible.



**747EV**

### FAILSAFE SAFETY SENSOR

2-wire system with LiftMaster signal IP44, range 15 meters.



**772E**

### 4-CHANNEL UNIVERSAL REMOTE CONTROL

Operates up to 4 openers. Compact to provide quick, easy garage access.



**TX4UNIF**

### GARAGE DOOR MONITOR<sup>2</sup>

MyQ enabled technology allows monitoring and closing up to four garage doors from any room in the house.



**829EV**

### FAILSAFE SAFETY SENSOR

2-wire system with LiftMaster signal IP44, range 10 meters.



**771EVK**

<sup>1</sup> In connection with MyQ.

<sup>2</sup> needs safety sensors.

## MASTERFUL ENGINEERING.

### MOTOR

- Heavy-Duty 24 V DC
- Automatic Thermal Protection
- Permanent Lubrication
- Operating Temperature: -25°C to 55°C

### POWER


- 220-240 V AC
- 50/60 Hz Voltage
- 0.8 W Stand-by Power
- 175 cm Power Cord UK

### MECHANICS

- High Quality Chassis and Cover
- Reliable & Powerful Direct Drive Mechanism
- Automatic Force Setting
- Electronic Limits for Easy Setup
- Maintenance-Free Operation




MYQ DC DIRECT DRIVE „ROLLING DOOR”  
FOR DOORS UP TO 120 KG.

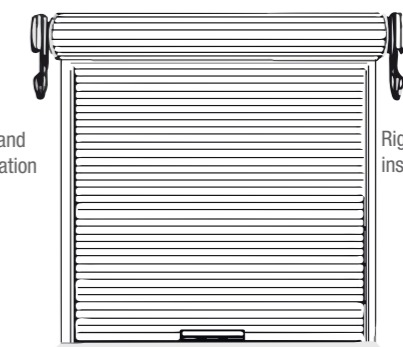

Left hand installation

Right hand installation

Minimum distance from edge of curtain to edge of door bracket 45 mm



## STANDARD SPECS.

### EVOLUTION RADIO (Security+ 2.0<sup>®</sup>)

High Range:



- 4-Button Remote Control (TX4EVS)
- Remote Control: **868 MHz Tri-Band**
- Rolling Door Opener: Frequency Agile on 868, 433.30, 433.92 and 434.54 MHz
- Copy-Protected Coding

### RADIO

**868 / 433 MHz**

- Provides 2-way communication from rolling door opener and accessories.
- Receiver with 64 memory registers.

**HOMELINK<sup>®</sup> COMPATIBLE**  
(VERSION V OR SOFTWARE REV. 8)<sup>1</sup>

<sup>1</sup> May require an external adapter depending on the model and year of your vehicle. Visit [HomeLink.com](http://HomeLink.com) for additional information.

### LIGHTING

LED LIGHT



- LED turns on with activation
- Turns off 3 minutes after operation
- 0.8 W Stand-by Power

## SAFETY AND SECURITY.

- External Quick Release (optional)
- Down Safety Reverse
- Up Safety Stop
- Soft-Start and Soft-Stop
- Timer to Close (automatic close) Programming (when safety sensors connected)



For more information visit us at [liftmaster.eu](http://liftmaster.eu) or contact your local dealer.

**LM750EVGB 550N**  
MYQ DC ROLLING DOOR OPENER  
FOR DOORS UP TO 120 KG

**LiftMaster**

© 2018 LiftMaster All Rights Reserved  
Chamberlain GmbH, Alfred-Nobel-Str. 4, D-66793, Saarwellingen  
LiftMaster.eu, WEEE-Reg.Nr. DE66256568  
MyQ<sup>®</sup> is a registered trademark of Chamberlain Group  
HomeLink<sup>®</sup> is a trademark of Gentex Corporation  
9SLM750EVGB